# Rollers

# Comfort and ease














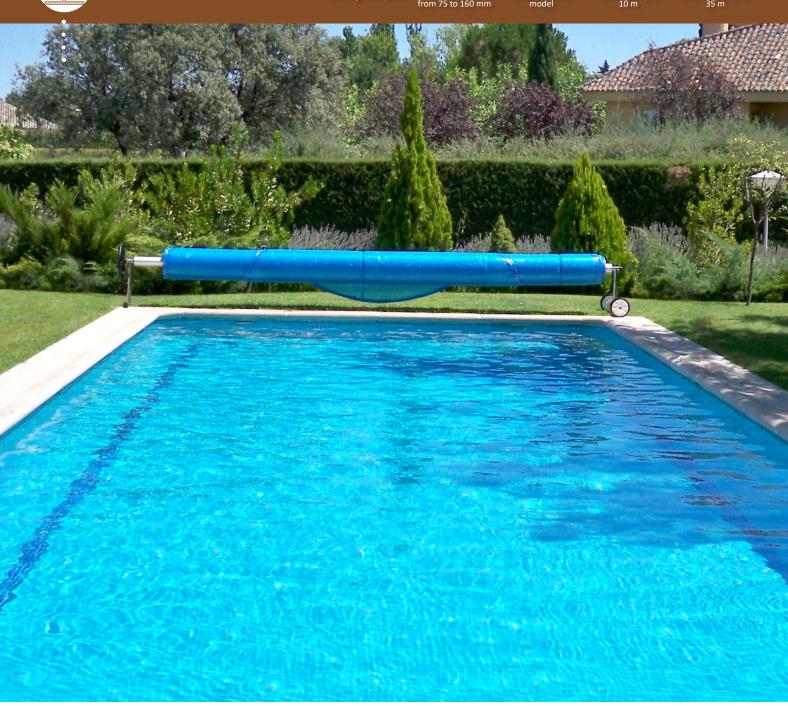





# Basic

# The most affordable.

- $\bullet \,$  Ø 40 mm stainless steel base stand with 2 wheels on one side.
- Ø 75 telescopic aluminium roller shaft. Tubes bolted together.
  A special groove incorporated into the tube, allows the bubble cover fastening kit to be installed easily and reliably.
- ø 320 mm handling wheel with brake (slowing and locking knob).

# Composition:


- 1 roller.
- 11 x 1.2 linear metres cabiclic bungee cords.

# Packaging:

2 packages	Dimensions in mm	Weight in kg
Stand	480 x 600 x 110	7
Roller shaft	160 x 80 x 2160	6

## Optional:

• Gripper strap universal attachment kit (see p.7).





\*See general conditions of sale.

# Adélaïde



# **Excellent value for money.**

- Low height, passivated stainless steel 35 mm square base stand with two wheels on one side and a synthetic resin bearing block.
- Telescopic Ø 80 mm thick reinforced roller shaft for the 20  $\mu$  anodised aluminium central tube.
- A special groove incorporated into the tube, allows the bubble cover fastening kit to be installed easily and reliably.
- Dual material ø 335 mm handling wheel with rotating handle and locking system.

### Composition:


- 1 roller.
- 13 x 1.2 linear metres cabiclic bungee cords.

### Packaging:

2 packages	Weight in kg			
Stand	630 x 430 x 130	6		
Roller shaft	2270 x 170 x 90	10		

### Optional:

• Gripper strap universal attachment kit (see p.7).

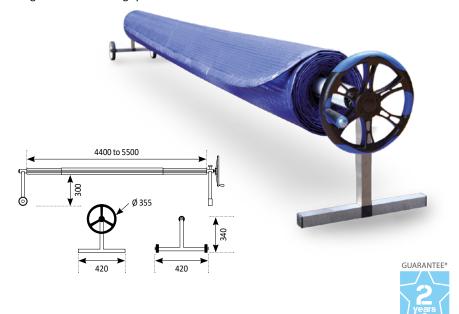

\*See general conditions of sale.

# Plus 4/5



# Quality and strength.

- ø 50 mm welded stainless steel base stand with 2 wheels on one side and a locking system.
- ø 100 mm telescopic aluminium roller shaft. Tubes bolted together.
- A special groove incorporated into the tube, allows the bubble cover fastening kit to be installed easily and reliably.
- Dual material ø 335 mm handling wheel with rotating handle and brake (slowing and locking knob).

# Composition:


- 1 roller.
- 11 x 1.2 linear metres cabiclic bungee cords.

# Packaging:


2 packages	Dimensions in mm	Weight in kg
Stand	470 x 620 x 140	8.2
Roller shaft	220 x 110 x 2230	11.5

# Optional:

• Gripper strap universal attachment kit (see p.7).

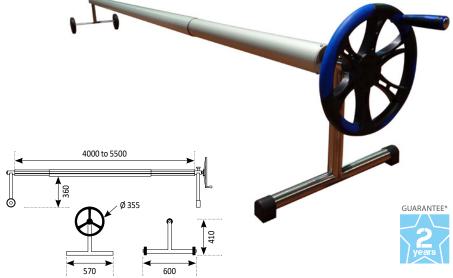

\*See general conditions of sale.

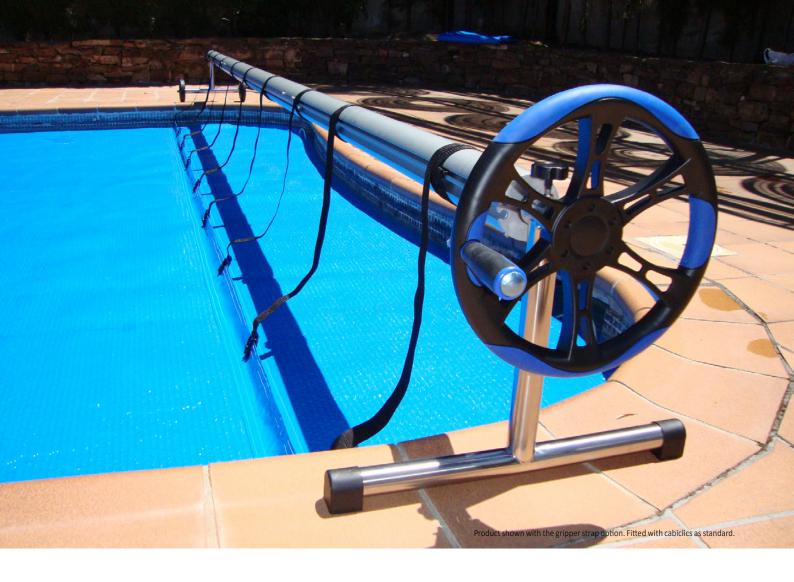

# Plus 5/6.5

# MADE SIN EUROPE

# Quality and strength.

- ø 50 mm welded stainless steel base stand with 2 wheels on one side.
- $\emptyset$  100 mm telescopic aluminium roller shaft. Tubes bolted together.
- A special groove incorporated into the tube, allows the bubble cover fastening kit to be installed easily and reliably.
- 1 Dual material hand-wheel with ø 355 mm rotating handle and brake (slowing and locking knob).

## Composition:


- 1 roller.
- 14 x 1.2 linear metres cabiclic bungee cords.

### Packaging:

2 packages	Dimensions in mm	Weight in kg		
Stand	470 x 620 x 140	9		
Roller shaft	220 x 110 x 3030	16.3		

# Optional:

 Gripper strap universal attachment kit (see p.7).





# Tahiti Prestige



# For pools up to 8 m.

- Passivated stainless steel square base stand with two wheels on one side and a synthetic resin bearing block.
- Telescopic Ø 110 mm roller shaft for the 20  $\mu$  anodised aluminium central tube.
- A special groove incorporated into the tube, allows the bubble cover fastening kit to be installed easily and reliably.
- Ø 320 mm hand-wheel with turning handle and brake.

### Composition:

- 1 roller.
- 13 x 1.2 linear metres cabiclic bungee cords.

### Packaging

Tahiti Prestige 6 to 7 m:


2 packages	Dimensions in mm	Weight in kg
Stand	650 x 510 x 220	7
Roller shaft	3510 x 230 x 200	26

### Tahiti Prestige 7 to 8 m:

2 packages	2 packages Dimensions in mm						
Stand	650 x 510 x 220	7					
Roller shaft	5900 x 230 x 210	40					

### Optional:

• Gripper strap universal attachment kit (see p.7).

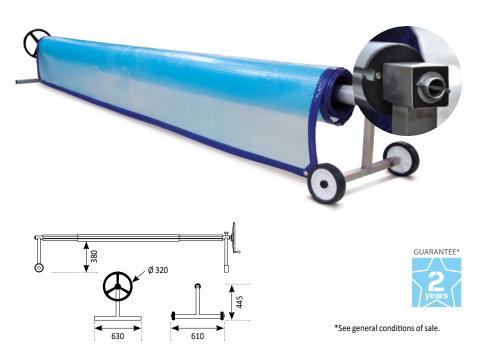

# Static motorised roller



# For bubble or foam covers.

- A motorised system allowing the rolling up of bubble or foam covers.
- The roller shaft (Ø 125 mm) is in one piece (non-telescopic) to guarantee optimum technical characteristics and minimum load-bearing deflection.
- The product is equipped with a mains powered motor, thereby guaranteeing optimum use even on large pools.
- To ensure correct operation, the roller will be adjusted to have a roller shaft 70 cm wider than the pool.

### Composition:

- 2 white base stands mounted on pool deck fixing plates.
- 1 smooth and fixed roller shaft.
- 1 tubular motor.
- 1 key-operated switch.
- 1 transformer box.
- 1 roller/cover connection kit.



\*See general conditions of sale.



# Forte mobile roller



# For pools up to 10 x 35 m\*.

- $\mbox{\ensuremath{^{\ast}}}$  Larger surface areas can be covered by installing several rollers and covers side by side.
- 100 mm square welded stainless steel base stand with 2 wheels on either side.

Ø 160 mm static aluminium roller shaft.
 (bespoke roller shaft length = 400 mm more than the pool width).


• Ø 700 mm hand-wheel and brake.

# Composition:

- 1 roller.
- Gripper strap fixing system.

# Packaging:

2 packages	Dimensions in mm	Weight in kg					
Stand	400 x 870 x 1000	40					
Roller shaft	Bespoke product: dimensions and weight depending on the size of the pool to be covered.						





\*See general conditions of sale.

# Bubble and roller accessories





### Protective slipcover

A standard protective slipcover and two ball-ended toggle cords are included in the price of the bubble cover except for the "Eco" model.

### **Gripper strap universal fixings**

They are used to fix a rough cut bubble cover to a roller or to attach a cover with eyelets.

# Description Blue detachable eyelet (per unit) Protective slipcover sold by the linear metre Protective slipcover sold in lengths of 4.20 m Protective slipcover sold in lengths of 5.20 m Protective slipcover sold in lengths of 6.20 m Protective slipcover sold in lengths of 8.20 m Ball-ended toggle cords for slipcovers (pair) Cabiclic cord for roller with loop and toggle - Length 1.20 m Cabiclic cord for roller with 2 toggles - length 1.20 m Cabiclic cord for roller with 2 toggles - length 2.50 m Universal gripper strap locking kit (set of 8)

# Rollers

Extend your bubble cover service life and find the model perfectly adapted to your pool.

Easy handling, easier installation and optimum pool covering.



# Rollers, table of comparison

		Ø	<b>←■</b> →		$\longleftrightarrow$	1	$m^2$	( E
	In ground pool	Roller shaft (mm)	Mobile	Static	Max. pool width (m)	Max. pool length (m)	Max. pool surface area (m²)	Electric power supply
Basic	✓	75	~		5	10	45	-
Adélaïde	<b>✓</b>	80	<b>✓</b>		5	10	50	-
Plus 4/5	<b>✓</b>	100	~		5	16	72	-
Plus 5/6.5	<b>✓</b>	100	~		6.5	16	88	-
Tahiti Prestige	<b>✓</b>	110	~		8	16	128	-
Motorised roller	<b>✓</b>	125		<b>✓</b>	6	15	90	<b>✓</b>
FORTE mobile roller	<b>✓</b>	160	<b>✓</b>		10	35	350	-

			Pool	width							
	4 m	4.5 m 5 m	5.5 m	6 m	6.5 m	8 m	10 m		BASIC - ADELAIDE	- PLUS - TAHITI P	RESTIGE
6 m 8 m									ADELAIDE - PLUS -	TAHITI PRESTIGE	
	//	// <del>//</del>	<i>/ / /</i>						PLUS 4/5 - TAHITI I	PRESTIGE	
12 m									PLUS 5/6.5 - TAHIT	I PRESTIGE	
0 14 m		/////	<i>}//</i>	$\angle \angle$					TAHITI PRESTIGE -	FORTE	
15 m 16 m	//	////							FORTE		
35 m								$\overline{C}$	MOTORISED		Poco

Recommended retailer



